


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
N/A	NC	INITIAL RELEASE	10-02-2013	
N/A	A	UPDATED TO 2023 FORMAT	12-05-2022	

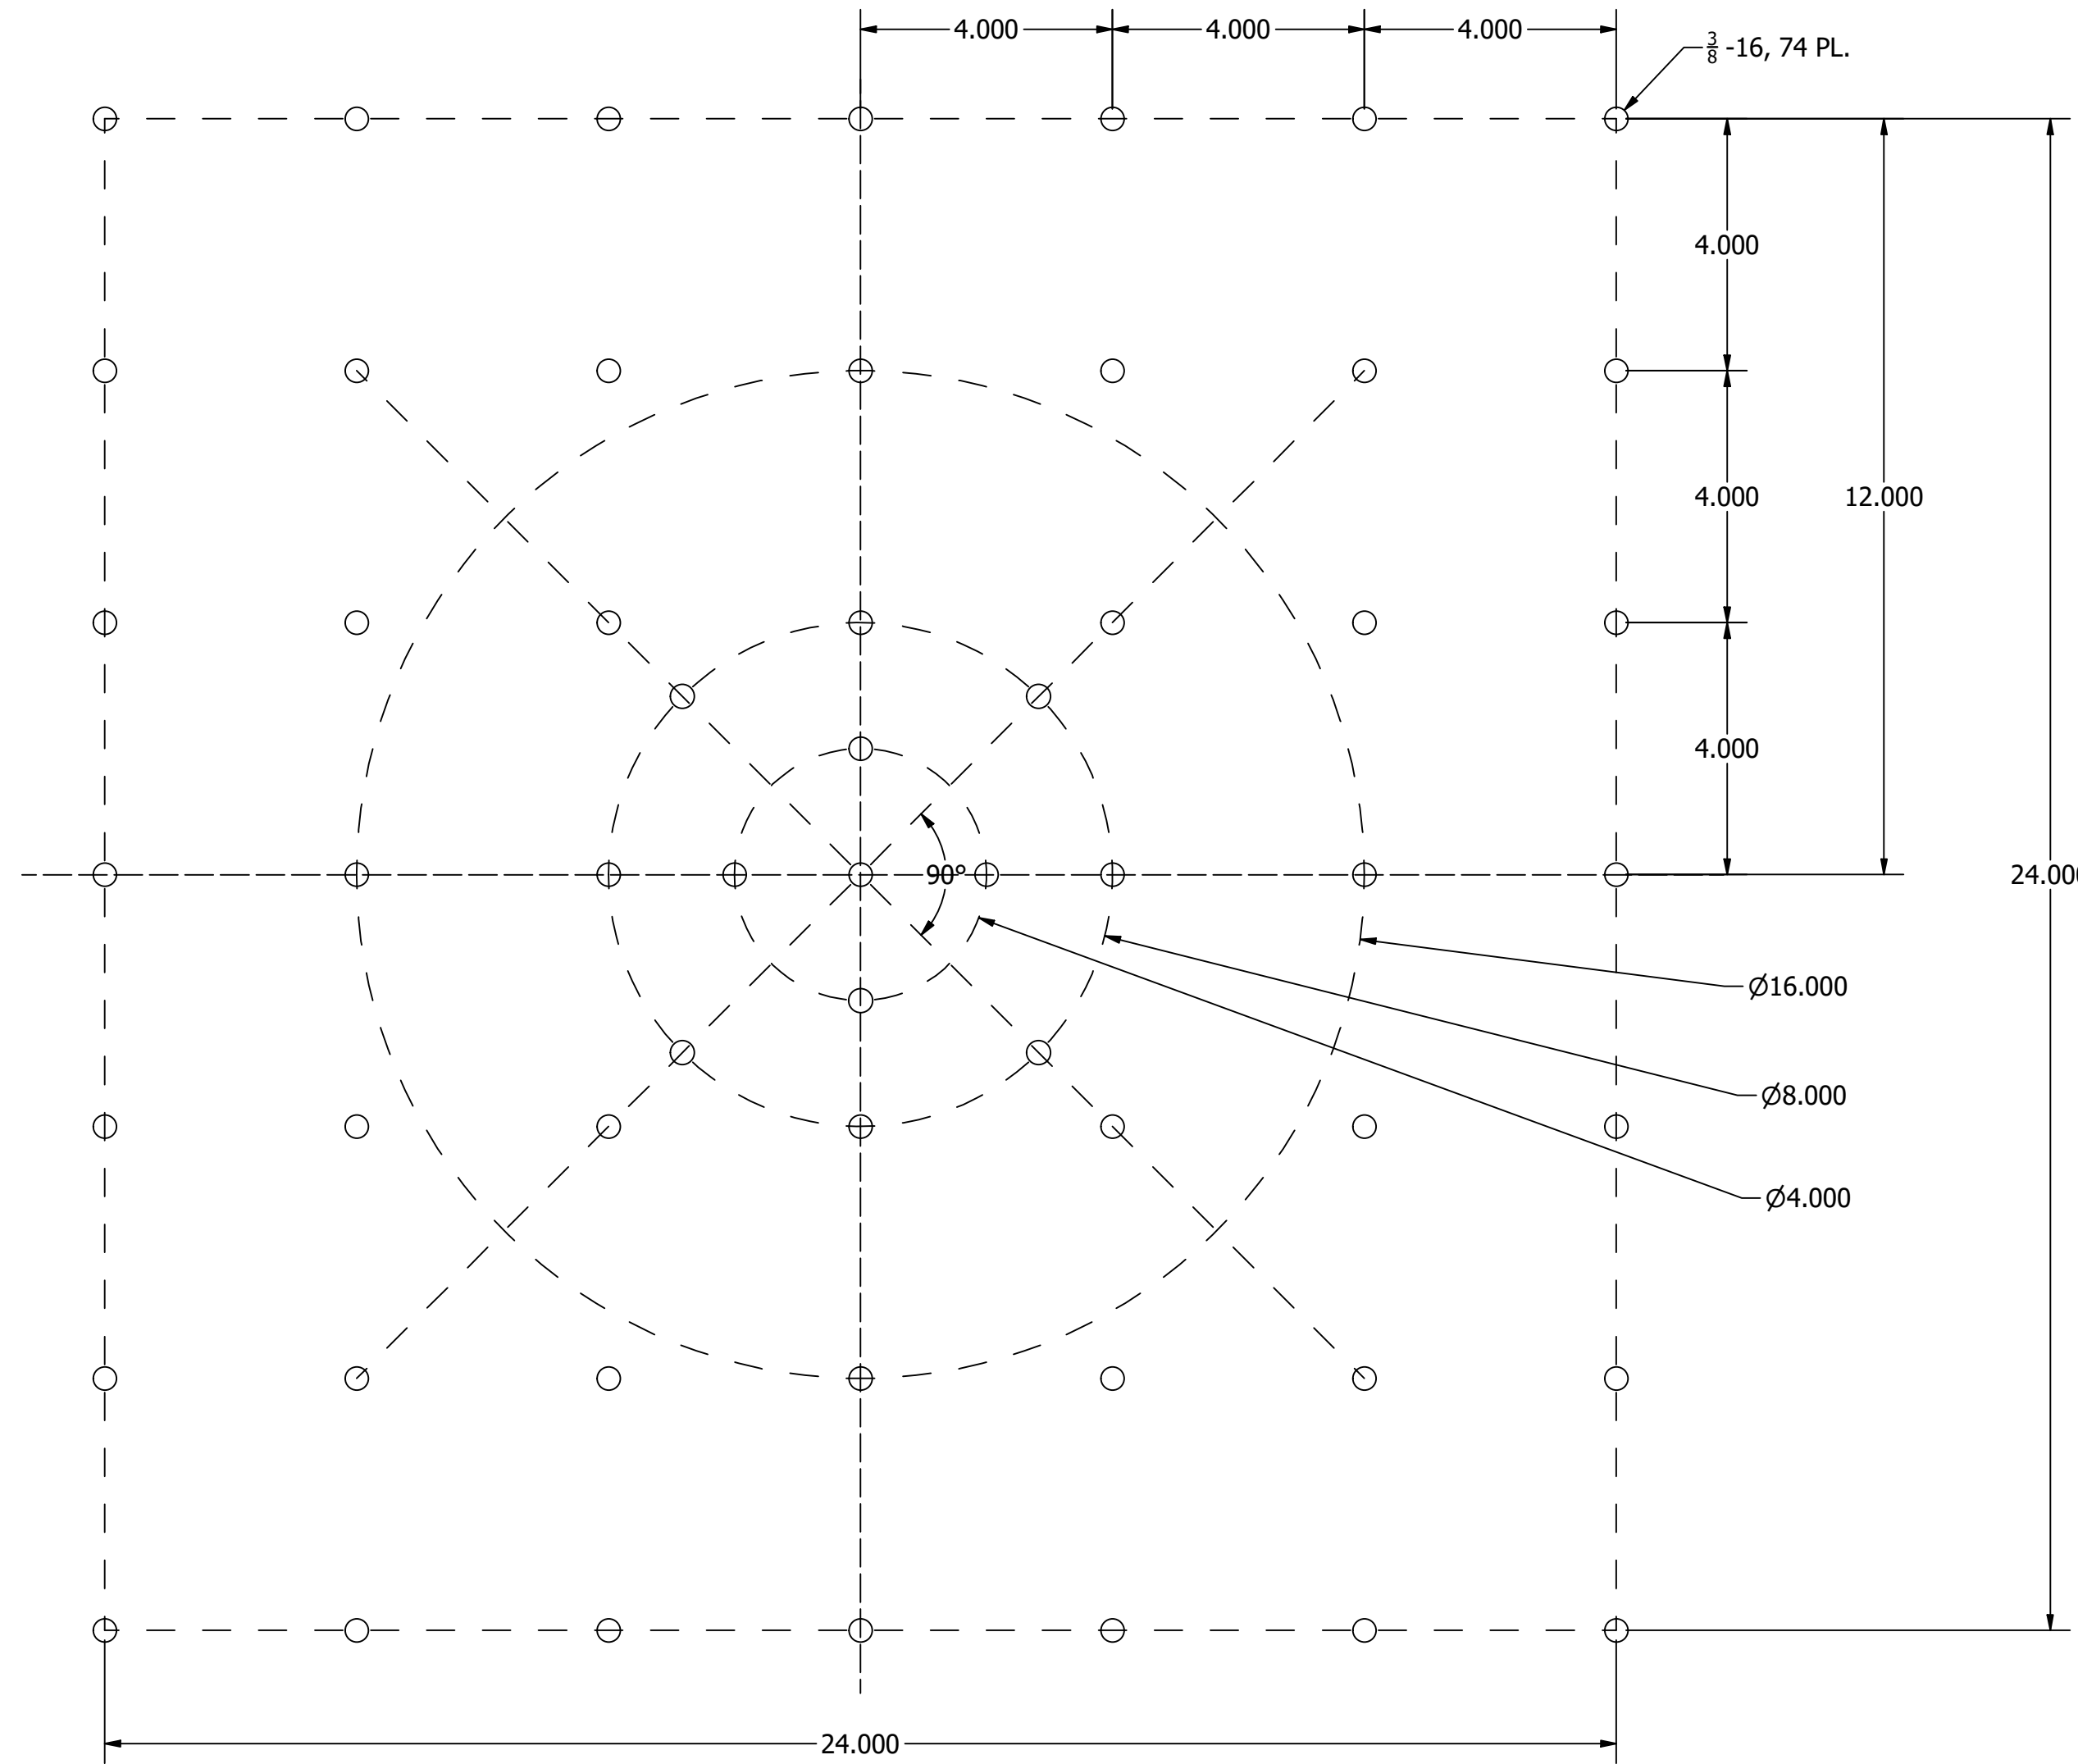

GENERAL NOTES

1. THIS VIBRATION SLIP PLATE HOLE PATTERN IS COMMON FOR USE ON VIBRATION EXCITERS (SHAKERS).
2. MATING FIXTURE DRILL TO ACCEPT $\frac{3}{8}$ SOCKET HEAD CAP SCREWS C-BORE AS-REQUIRED.
3. ANY FIXTURE SHALL REST FLAT ON THE SLIP PLATE WITH A MAXIMUM ALLOWABLE GAP OF 0.01" BETWEEN THE SLIP PLATE AND FIXTURE OR BUSHINGS.
4. MOUNTING BOLT TORQUE NOT TO EXCEED 34 FT/LBS.

TOLERANCES			
LINEAR		HOLE DIAMETERS	
.X	+/- 0.03	.X	+/- 0.003
.XX	+/- 0.01	.XX	+/- 0.030
.XXX	+/- 0.005	.XXX	+/- 0.005

UNLESS OTHERWISE SPECIFIED DIMS ARE IN INCHES

ENGINEERING APPVL:	DATE:
QUALITY APPVL:	DATE:

TYPICAL SHAKER MOUNTING HOLE PATTERN			
ENVIRONMENT ASSOCIATES INC. 9604 VARIEL AVE., CHATSWORTH, CA 91311 (818) 709-0568 FAX (818) 709-8914			
SIZE	FSCM NO.	DWG NO.	REV
A	8M650	1006	NC
SCALE	MBD	FAB P/N	SHEET 1 OF 1